


JANUS

2 OUTS EOE CONVERSION SYSTEM

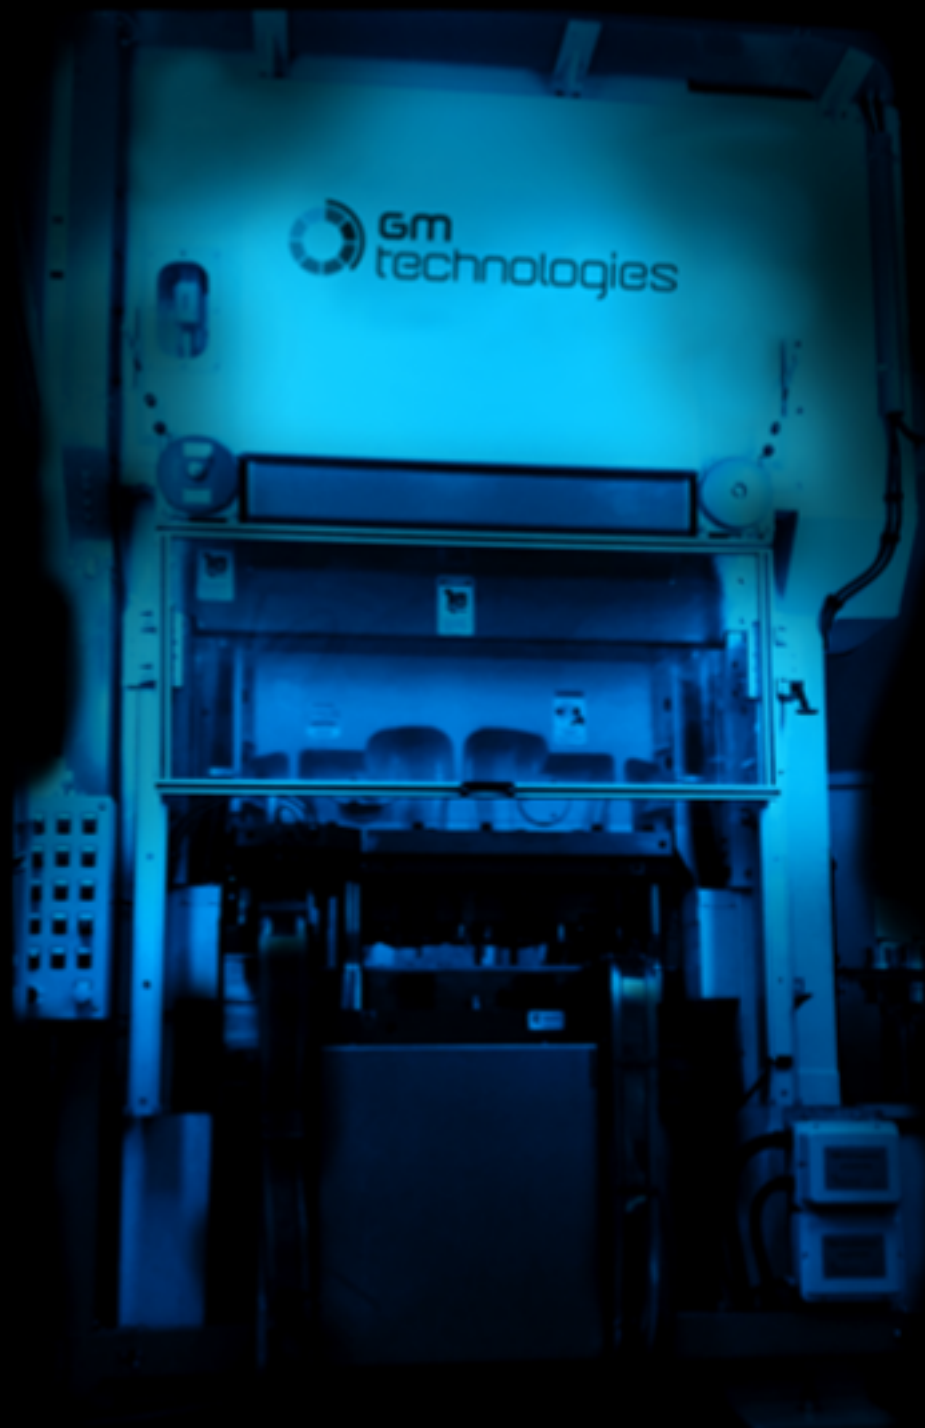

GM
technologies

JANUS

2 OUTS EOE CONVERSION SYSTEM



CARATTERISTICHE TECNICHE TECHNICAL SPECIFICATIONS

Tipo Type	SLOW	HIGH
Numero di uscite Number of out	2 out	2 out
Tonnellaggio Tonnage	100	100
Velocità massima Max speed	300 cpm/spm	600 cpm/spm
Formati coperchio End sizes	150 up to 53mm - rectangular	
Trasporto Transfer	Steel or Rubber	
Materiale End material	Alluminum or Steel	
Spessore tab Tab thickness	0.25 up to 0.38mm	
Coperchi/minuto Output/minute	600 epm	1000 epm
Coperchi annui stimati Estimated yearly production	150 MLN	250 MLN

GMT ADVANCED TECHNOLOGICAL DEVICES



ANVIL SETTING



DOUBLE ENDS



LIGHT TESTER



LOAD MONITOR



MISSING TAB



SCORE CONTROL